

PRESS BENCH ASSEMBLY INSTRUCTIONS

Main Parts

Item no.	Qty	Description
1	1	Bench top
2	2	Bench legs
3	1	Bracing bar
4	2	Adjustable Feet

Additional Fixings

5	4	M8 x 60mm coach bolts
6	4	M8 nuts
7	6	M8 washers
8	2	M8 x 40 bolts
9	4	M12 x 60 bolts
10	8	M12 washers
11	4	M12 Nuts
12	1	Assembly spanner
13	2	M10 Nuts




Step 1



Screw the M10 nuts (item 13) all the way onto the threads of the adjustable feet (item no. 4), then screw the feet into the threaded hole on the bottom of each of the rear legs. When fully assembled these feet can be adjusted to level the bench, and the nuts lock them in place.

Step 2

Ensure the bench top is the correct way round.

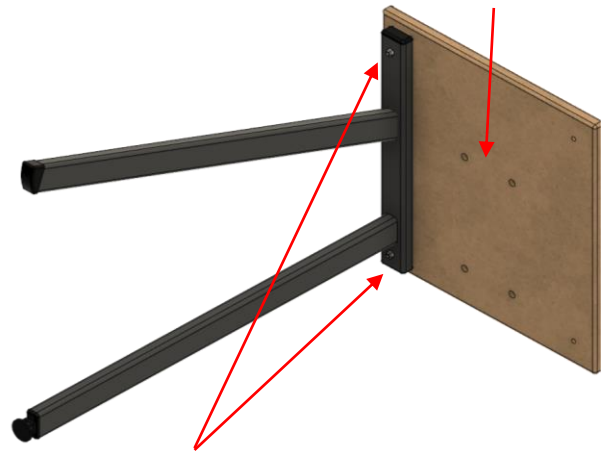


Use the domed coach bolts, washers & nuts (item no's. 5,6&7) to fix the bench top to the first leg

Step 3



Now fix the second leg in the same way.

Step 4

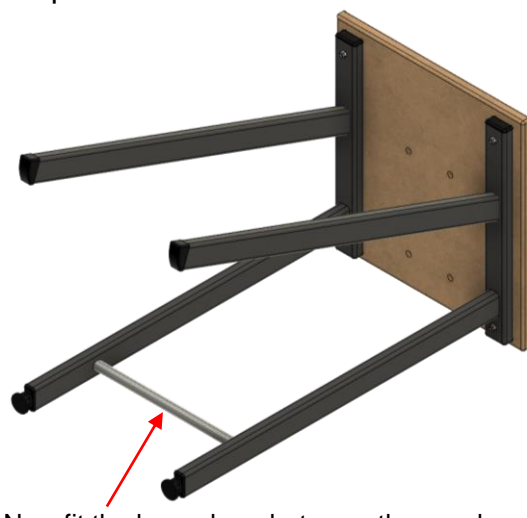

Now fit the brace bars between the rear leg using the M8 x 40mm bolts and washers.

Finally stand the bench upright and ensure all fixings are tight before fixing the press to the bench using the remaining M12 bolts, nuts & washers.